

## Maintenance and Cleaning

Under normal operating conditions these mixers do not require anything other than occasional routine maintenance. For instance, if the flow pattern from the spout becomes irregular this is most likely caused by some impurity having become lodged behind the antispash. Should this happen the antispash can be unscrewed and the obstruction removed. Likewise if the mixer starts to drip, attention may be required to the ceramic disk cartridge which can be easily unscrewed and cleaned or replaced as necessary.

**Care of Finish.** Our mixers have been most carefully manufactured and their surfaces will maintain their appearance for a long time provided they are only cleaned with a soft cloth, soap and water. Under no circumstances should any abrasive liquid, powder or scouring pad be used.

You should also retain your dated invoices as proof of purchase to validate any claims under our guarantee.

## Guarantee and Liability.

### 5 Years

Your **eLIX** mixer has been manufactured to the high standard you would expect of any Carron Phoenix product. But in the unlikely event that you should experience any defect in the materials or workmanship within five years of purchase, we will replace the faulty part free of charge. This is provided the mixer has only been used for normal domestic purposes in the UK and that the installation and maintenance instructions have been observed.

The surface finish is guaranteed for two years from the date of purchase provided our advice concerning care has been observed and no scouring agents have been used. Scuffs and scratches caused by normal wear and tear, improper installation or accidental damage are excluded from the guarantee.

**Please ensure that this kitchen tap is installed in accordance with local water bye laws**

**Customer Service  
Telephone number 01324 638321**

# eLIX


## Kitchen Sink Mixer

## Installation & Care Guide



**CARRON**  
PHOENIX  
[www.carron.com](http://www.carron.com)

## Spare parts

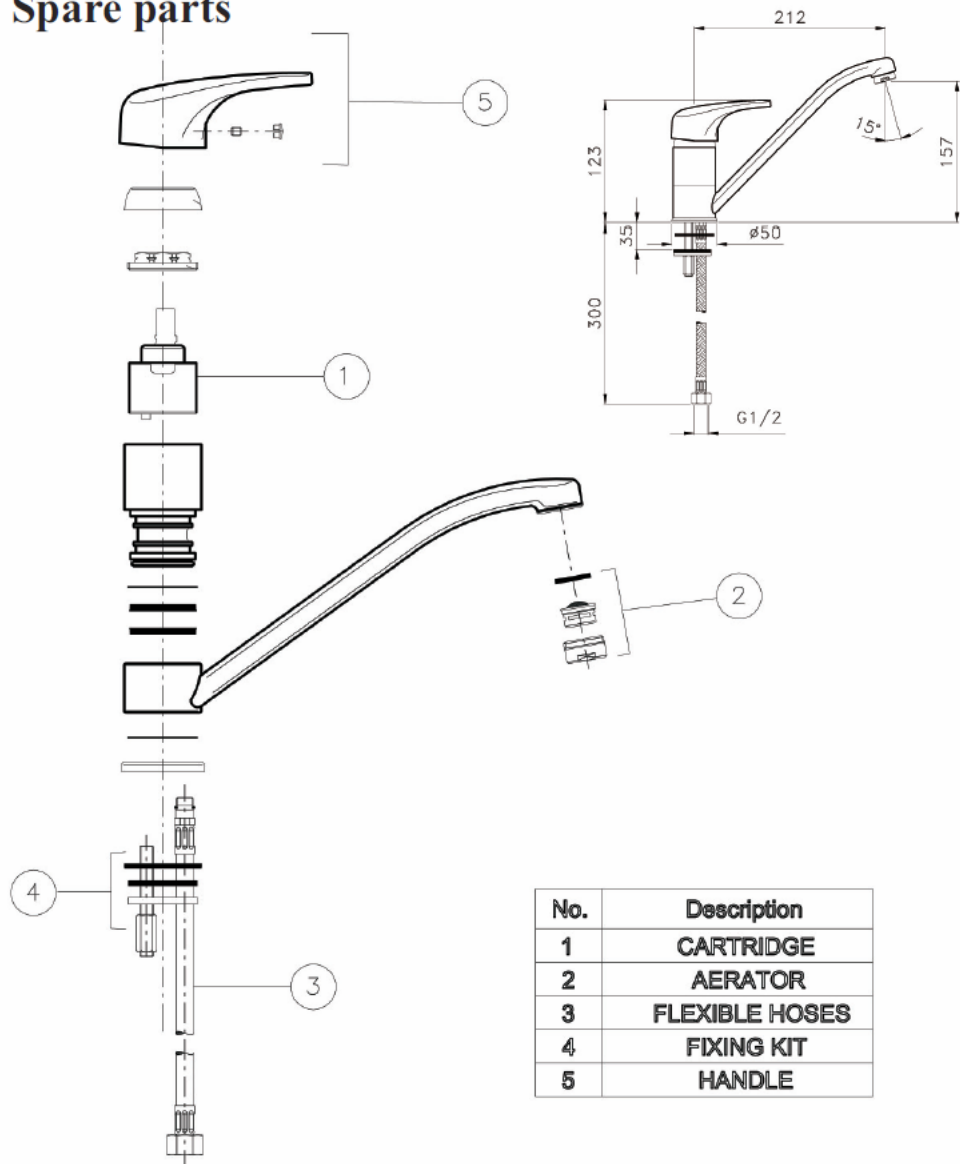

No.	Description
1	CARTRIDGE
2	AERATOR
3	FLEXIBLE HOSES
4	FIXING KIT
5	HANDLE

### Technical Data

Maximum water pressure  
75 PSI ( 5 bar )

Maximum hot water temperature 55°C

Note: If this temperature are exceeded, even for a short time, damage to the coated surfaces can result.

## Before you Start...

Read this leaflet carefully before proceeding.  
If your remain in doubt regarding your competence to install this product, we recommend you employ the services of a registered plumber.

## Installation Instructions

**Attention.** Before installing the new mixer it is essential that the supply pipes are thoroughly flushed through in order to remove any swarf, debris or other impurities that may damage moving parts within the mixer or obstruct the flow of water through the spout.

**Installation.** First place the mixer in position on the sink to see if any alteration to the existing pipework is necessary.

After making any necessary alteration, fix the mixer with the appropriate fixing kit (No. 4). Then the flexible hoses (1/2") have to be connected to the hot and cold water supply.